



PERFORMANCE REPORT 2600 HYBRID / **PATHFINDER** ANGLER DRIVEN

Boat: 2600 HYBRID | Engine: Yamaha F350XSA2 | Configuration: Single | Test Date: 10/6/2025

2600 HYBRID

Length _____ 26' 2"
Beam _____ 8' 10"
Maximum HP _____ 450 hp
Fuel Capacity _____ 88 gal
Weight as Tested _____ 6,192 lbs

F350XSA2

Horsepower _____ 350 hp
Induction _____ EFI/VCT/DOHC
Displacement _____ 4.3L
Weight (Estimated) _____ 629 lbs
Gear Ratio _____ 1.75:1

ENGINE MOUNTING HEIGHT

Mounting Hole Position _____ #2

PROPELLER(S)

Series _____ Saltwater Series II
Diameter x Pitch _____ 15-1/4 x 19
Yamaha Part # _____ 6KA-45972-00-00
Propeller Material _____ Stainless Steel

TEST CONDITIONS

Number of People _____ 2
Air / Water Temperature _____ 83° F / 80° F
Elevation (in feet above sea level) _____ 0'
Wind Velocity _____ 15-20 MPH


COMMENTS

Test weight includes: 77 gallons of fuel, 5 batteries, second station, dual power poles, trolling motor, SeaKeeper Ride, safety and test equipment.

YPB#: PB_PAT_2600 TRS_0_F350XSA2_10-16-2025_BAY

RPM	MPH	GPH	MPG
1000	5.4	1.2	4.50
1500	7.3	2.2	3.40
2000	8.7	4.0	2.18
2500	11.8	6.4	1.86
3000	19.6	8.2	2.40
3500	30.5	10.0	3.06
4000	35.8	12.5	2.86
4500	41.5	15.4	2.70
5000	46.9	20.2	2.32
5500	52.1	28.1	1.85
6000	55.1	30.2	1.83

0-20 MPH | 7.24 SECONDS

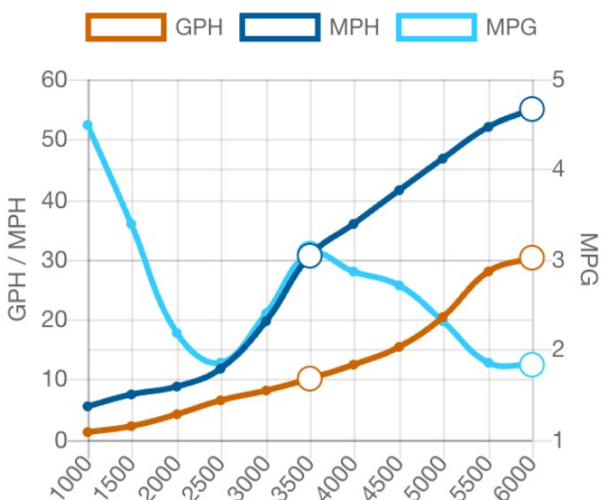

Powered by **YAMAHA**

NOTICE TO CONSUMER

The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.